

C65 ICHP MicroTurbine Natural Gas - CARB Certified



CARB certified to achieve ultra-low emissions and reliable electrical/thermal generation from natural gas.

- Less than 4 ppm volume NO_x emissions at 15% O₂ – among industry's lowest
- Reliable electrical/thermal generation from natural gas
- One moving part – minimal maintenance and downtime
- Patented air bearing – no lubricating oil or coolant
- 5 and 9 year Factory Protection Plans available
- Remote monitoring and diagnostic capabilities
- Integrated utility synchronization and protection⁽¹⁾
- Small, modular design allows for easy, low-cost installation
- Reliable – tens of millions of run hours and counting



C65 CARB ICHP MicroTurbine

Electrical Performance⁽²⁾

Electrical Power Output	65kW
Voltage	400–480 VAC
Electrical Service	3-Phase, 4 wire
Frequency	50/60 Hz, grid connect operation 10–60 Hz, stand alone operation
Maximum Output Current	100A, grid connect operation 100A, stand alone operation ⁽³⁾
Electrical Efficiency LHV	28%

Fuel/Engine Characteristics⁽²⁾

Natural Gas HHV	30.7–47.5 MJ/m ³ (825–1,275 BTU/scf)
Inlet Pressure ⁽⁴⁾	517–552 kPa gauge (75–80 psig)
Fuel Flow HHV	919 MJ/hr (871,000 BTU/hr)
Net Heat Rate LHV	12.9 MJ/kWh (12,200 BTU/kWh)

Exhaust Characteristics⁽²⁾

NO _x Emissions @ 15% O ₂ ⁽⁵⁾	< 4 ppmvd (8 mg/m ³)
NO _x / Electrical & Thermal Output ⁽⁵⁾⁽⁶⁾	0.06 g/bhp-hr (0.17 lb/MWhe)
Exhaust Gas Flow	0.51 kg/s (1.13 lbm/s)
Exhaust Gas Temperature	311°C (592°F) (Heat Recovery Bypassed)

Reliable power when and where you need it. Clean and simple.

C65 ICHP Heat Recovery⁽⁷⁾

Integrated Heat Recovery Module Type	Copper Core
Hot Water Heat Recovery	118kW (0.40 MMBTU/hr)

Dimensions & Weight⁽⁸⁾

Width x Depth ⁽⁹⁾ x Height ⁽¹⁰⁾	0.76 x 2.2 x 2.6 m (30 x 87 x 103 in)
Weight – Grid Connect Model	1090 kg (2,400 lb)
Weight – Dual Mode Model	1450 kg (3,200 lb)

Minimum Clearance Requirements⁽¹¹⁾


Horizontal Clearance	
Left & Right	0.76 m (30 in)
Front ⁽¹²⁾	1.65 m (65 in)
Rear	0.76 m (30 in)

Sound Levels

Acoustic Emissions at Full Load Power ⁽¹³⁾	
Nominal at 10 m (33 ft)	65 dBA

Certifications

- Certified to UL 2200 and UL 1741 for natural gas operation (UL files AU2687, E209370)
- Complies with IEEE 1547 and meets statewide utility interconnection requirements for California Rule 21 and the New York State Public Service Commission
- Certification to California Air Resources Board (CARB) 2007 for operation on Natural Gas
- CE certified models available with CARB level emissions

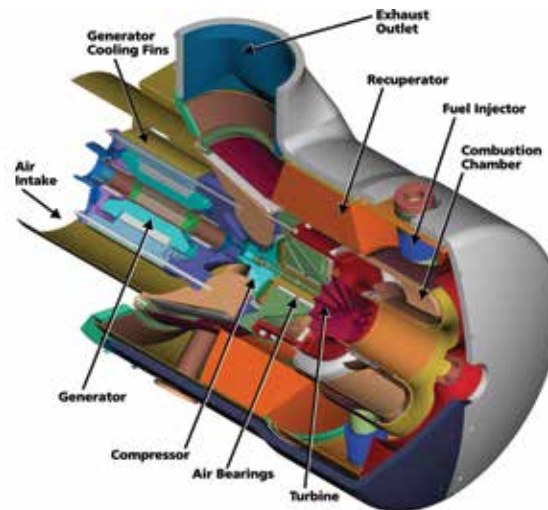

- (1) Some utilities may require additional equipment for grid interconnectivity.
(2) Nominal full power performance at ISO conditions: 59°F, 14.696 psia, 60% RH
(3) With linear load
(4) Inlet pressure for standard natural gas at 39.4 MJ/Nm³ (1,000 BTU/scf) (HHV)
(5) Exhaust emissions for standard natural gas at 39.4 MJ/Nm³ (1,000 BTU/scf) (HHV)
(6) At full heat recovery for all allowable C65 CARB ICHP water temperatures and flow rates
(7) Heat recovery for water inlet temperature of 60°C (140°F) and flow rate of 2.5 l/s (40 GPM)
(8) Approximate dimensions and weights
(9) Depth includes 10 inch extension for the heat recovery module rain hood on ICHP versions
(10) Height dimensions are to the roof line. Exhaust outlet extends at least 7 inches above the roof line
(11) Clearance requirements may increase due to local code considerations
(12) Dual Mode MicroTurbine configuration for Battery Removal clearance
(13) The optional acoustic inlet hood kit can reduce acoustic emissions at the front of the MicroTurbine by up to 5 dBA
Specifications are not warranted and are subject to change without notice.

